

# Ketron<sup>®</sup> PEEK Reference Guide



NORSOK M-710 certified  
stock shapes for oil, gas and  
petrochemical applications




# Ketron® PEEK

## NORSOK M-710 certified stock shapes for oil, gas and petrochemical applications


### Competitive advantage

The Mitsubishi Chemical Group (MCG) Advanced Materials Division develops the materials of choice for design engineers where performance and reliability are required in extreme and hostile environments. Advanced properties of chemical and abrasion resistance combined with HPLT/ HPHT ratings and superior strength make the MCG Advanced Materials family of materials the ideal choice for structural parts, bushings, bearings, seals and back up rings.



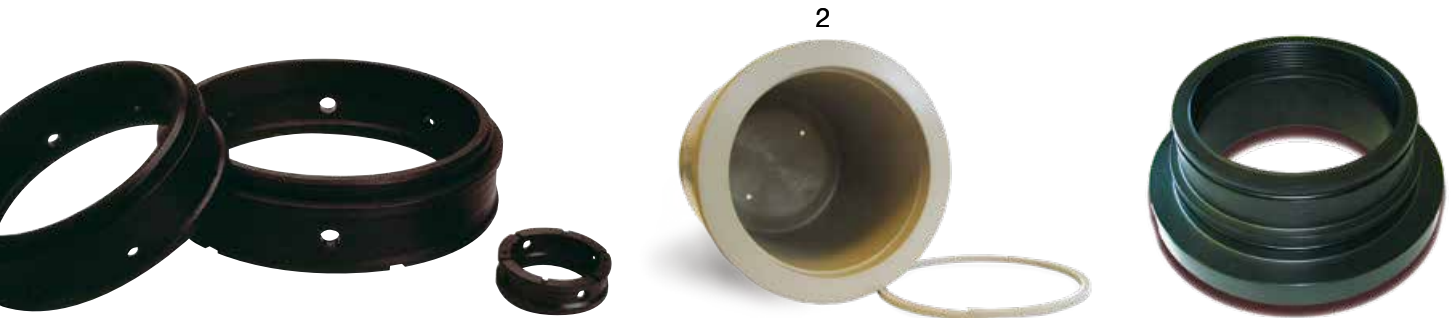

MCG's global partnerships provide technical service and application development. Flexibility in material portfolio and manufacturing capabilities provide our clients with a competitive edge. MCG Advanced Materials can provide the platform for bringing your concept to the production line, from high volume molded parts to lower volume custom cast and machined components.

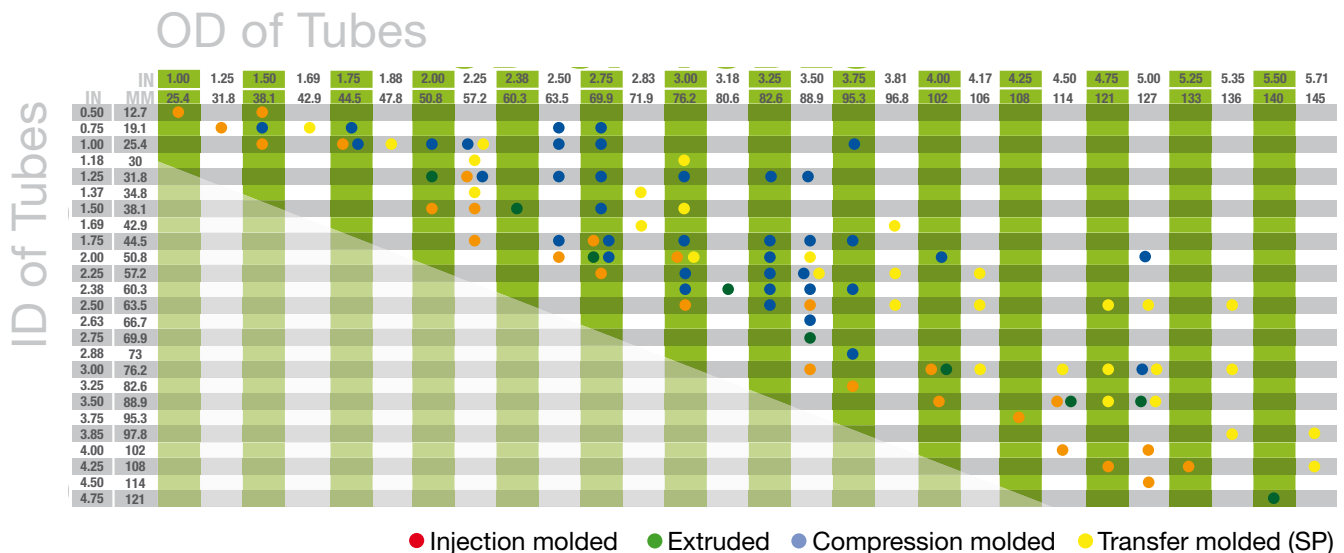

### Near Net Shapes tooling size chart



NOTE: Other sizes are available, contact an MCG Advanced Materials representative for more information. This chart does not include segmented weld rings that are custom designed.

Materials	NORSOK M-710 approved	Process method	Max operating temperature	Material advantages
Ketron® 1000 PEEK EXT		Extruded	480°F 250°C	Unfilled PEEK in extruded plate, rod & tube. Offers highest elongation of all PEEK grades. Ideal for large cross section tube in small quantities.
Ketron® 1000 PEEK IM		Injection molded	480°F 250°C	Unfilled PEEK in injection molded tubes. Higher internal stress than extruded or compression molded. Excellent combination of thermal resistance and high compressive strength.
Ketron® 1000 PEEK SP		Compression molded	480°F 250°C	Unfilled PEEK in compression molded rings.
Ketron® CA30 PEEK		Extruded	480°F 250°C	30% carbon fiber filled PEEK in extruded plate, rod & tube. More thermal conductivity than unreinforced PEEK with enhanced compressive strength and stiffness.

### Segmented Welded Rings

<b>Principle objective:</b>	Welding of segments into large OD rings consisting of 4, 6, or 8 segments
<b>Materials:</b>	Depending on OD ring size & plate availability PEEK natural, PEEK + PTFE (completed) development of other materials on-going PEEK + carbon fibers, PEEK + glass fibers, PPS-HPV
<b>Size Range:</b>	OD range: min 700 mm – max 3 m Cross Section: 100 x 100 mm max, typically range 25 x 50 mm
<b>Applications:</b>	Industries: oil & gas, aerospace, industrial, military equipment Large dia. high temperature/high pressure seals, BU rings, guide ring
<b>Required Equipment:</b>	Dedicated high temperature mirror welding system, fully computer controlled welding system (temp, forces, displacements)

Near Net Shapes have chemical resistance, low deformation, proven mechanical properties, dimensional stability, excellent machinability

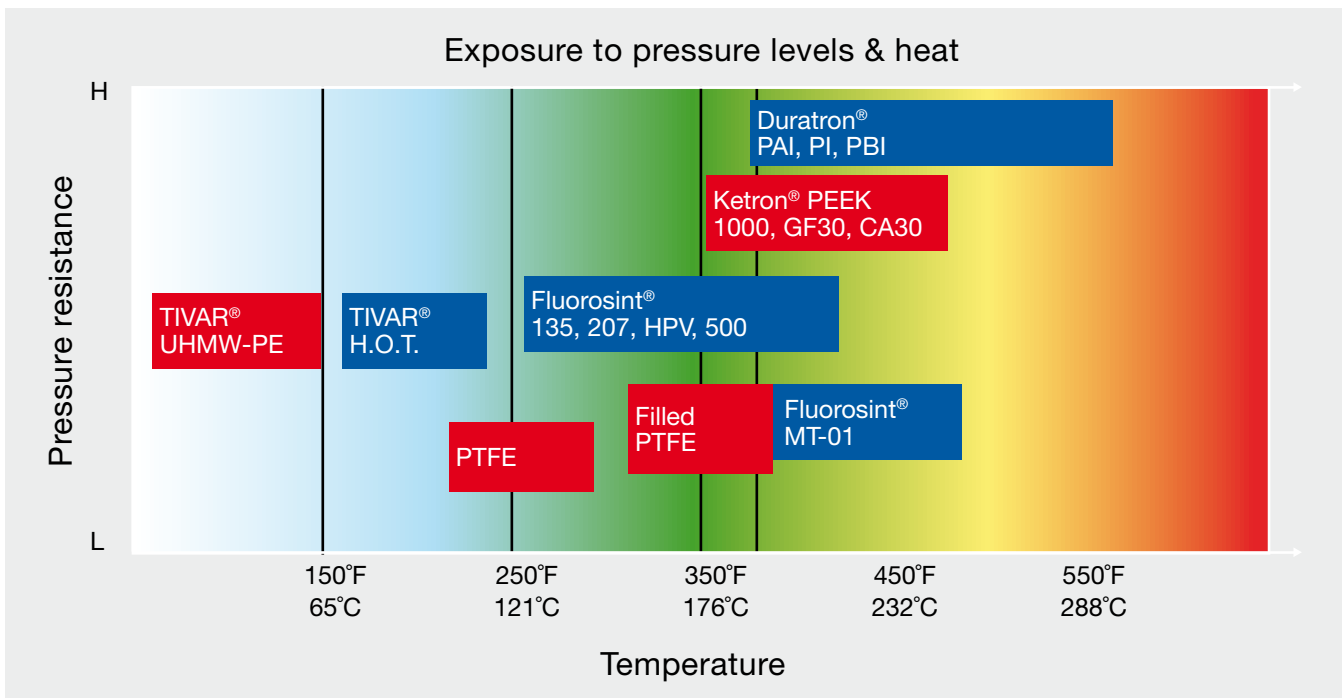




Photo courtesy of Elliott Compressor


“Polymer Labyrinth Seals provide much greater efficiency and provide the increased performance over a much greater service life”

**Seal material selection matrix**



TIVAR® H.O.T. / Fluorosint® / Duratron® Family - Fill in the performance gaps left by traditional materials. MCG Advanced Materials offers a wide variety of materials to solve current and future design challenges for improved MTBR (Mean Time Between Repairs).

## Material options in changing environmental conditions HPHT (High Pressure High Temperature)

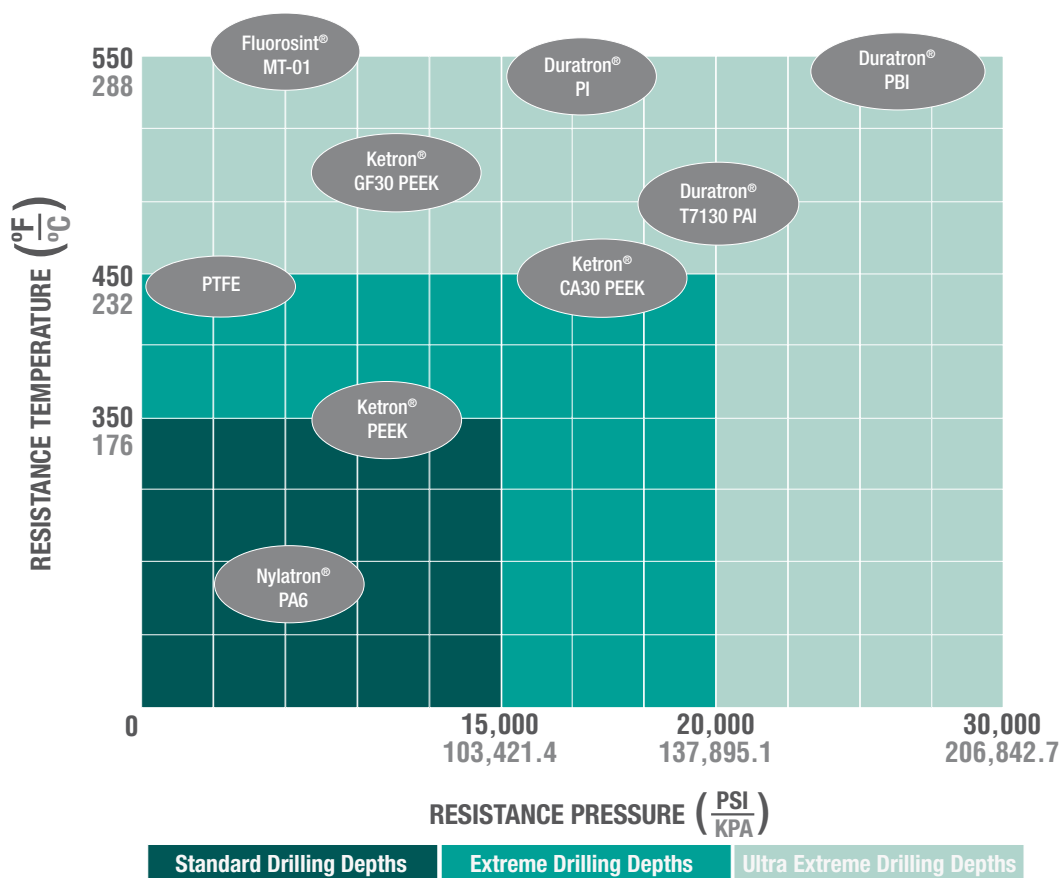

### Key benefits

- High mechanical strength
- Chemical and corrosion resistant
- Materials operating in temperatures of -50°F (-45.5°C) to 480°F (250°C)
- Low weight compared to metal components
- Low coefficient of friction
- Low moisture absorption
- Excellent dimensional stability and quality
- Low coefficient of thermal expansion
- NORSOK M-710 (sour gas aging) compliance for Ketron® PEEK stock shapes

### Common applications

- Pipeline systems (pipe in pipe spacers, pipe clamps, lined pipe, pipe collars)
- Subsea vehicles (thruster cowlings, bearing, seals)
- Lifting equipment (cable sheaves, hook blocks, bearing pads)
- Instrumentation (insulators, sensor protectors, guidance probes, connectors)
- Compressor, pump and valve components (seals, bearings and wear components, backup rings, lantern rings)
- Offshore equipment (bushings, slide pads)
- Large diameter bouy seal rings to over 16.4ft (5m)



MCG Advanced Materials was the world's first stock shape manufacturer to earn NORSOK M-710 compliance and provides the most accurate and reliable data on their stock shapes.


The NORSOK M-710 specification was developed by the Norwegian petroleum industry to ensure sufficient understanding and experience of oil and gas materials. It specifies a test procedure to predict the progressive degradation of thermoplastic materials exposed to a sour fluid at elevated pressure and temperature over an extended period of time. NORSOK M-710 defines

the requirements for critical non-metallic (polymer) sealing, seat and back-up materials and components for permanent use subsea, including well completion, christmas trees, control systems & valves, and topside valves in critical gas systems.

**The global industry leader**

replacing metals and alloys by delivering stronger, lighter-weight plastic and polymer materials with superior corrosion & extreme temperature resistance

**Performance advantages start here**

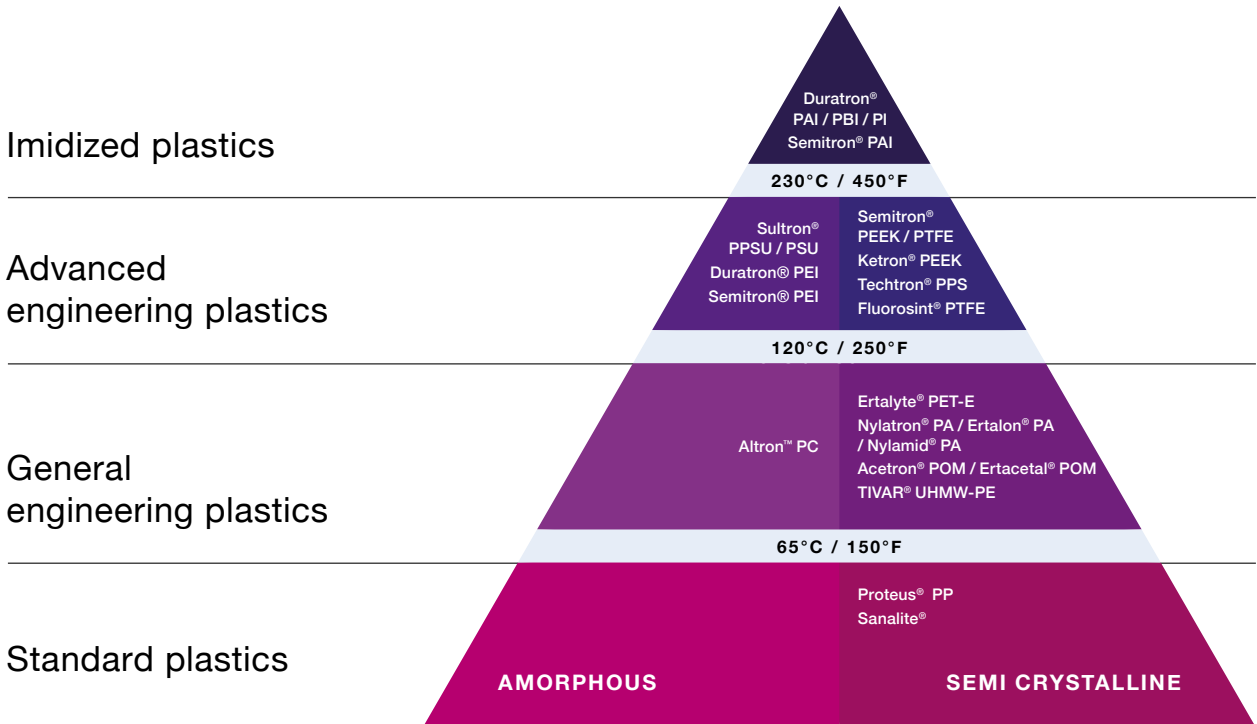

MCG ADVANCED MATERIALS:  
**LOW STRESS**

OTHER MARKET OFFERINGS:  
**HIGH STRESS**

**WE TAKE THE STRESS OUT**

Specify the shape manufacturer and then you are specifying a process which includes consistent resin and consistent shape properties...including consistent low stress materials. Let MCG Advanced Materials eliminate the guess work and provide a consistent low stress shape regardless of the resin.



Distributed by:

mcam.com

#### Europe

Mitsubishi Chemical  
Advanced Materials NV  
Galgenveldstraat 12  
8700 Tielt, Belgium  
T +32[0] 51 42 35 11  
F +32[0] 51 42 33 10  
contact@mcam.com

#### North America

Mitsubishi Chemical  
Advanced Materials Inc.  
2120 Fairmont Avenue  
PO Box 14235 - Reading, PA 19612-4235  
T 800 366 0300 | +1 610 320 6600  
F 800 366 0301 | +1 610 320 6638  
contact@mcam.com

#### Asia-Pacific

Mitsubishi Chemical  
Advanced Materials Asia Pacific Ltd.  
Unit 7B, 35/F, Cable TV Tower,  
9 Hoi Shing Road, Tsuen Wan, Hong Kong  
T +852 2470 26 83  
F +852 2478 99 66  
contact@mcam.com

Belgium | Brazil | China | France | Germany | Hong Kong | Hungary | India | Italy | Japan | Korea | Mexico |  
South Africa | Switzerland | Thailand | The Netherlands | United Kingdom | United States of America

All statements, technical information, recommendations, and advice are for informational purposes only and are not intended and should not be construed as a warranty of any type or term of sale. The reader, however, is cautioned that Mitsubishi Chemical Advanced Materials does not guarantee the accuracy or completeness of this information and it is the customer's responsibility to test and assess the suitability of the products of Mitsubishi Chemical Advanced Materials in any given application or for use in a finished device.

Acetron®, Borotron®, Duratron®, Ertacetal®, Ertalon®, Ertalyte®, Fluorosint®, Ketron®, Nylatron®, Quadrant®, Semitron®, Symalit®, Techtron® and TIVAR® are registered trademarks of Mitsubishi Chemical Advanced Materials.

Follow us



@MCAMconnect

