



Duratron® D7000 PI

Machinable Polyimide

Thermal Resistance Over 600°F

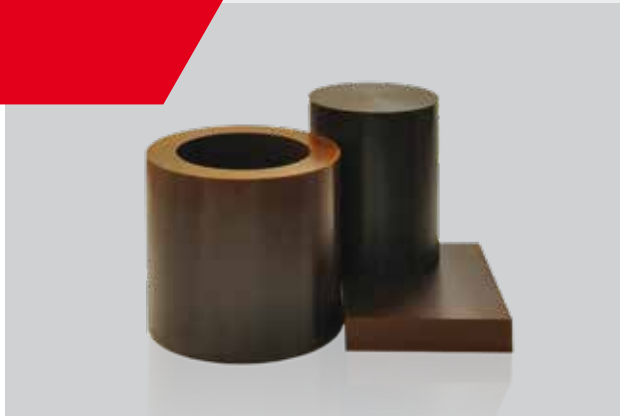

A Perfect Fit (Heat Deflection Temperature - 264 psi)

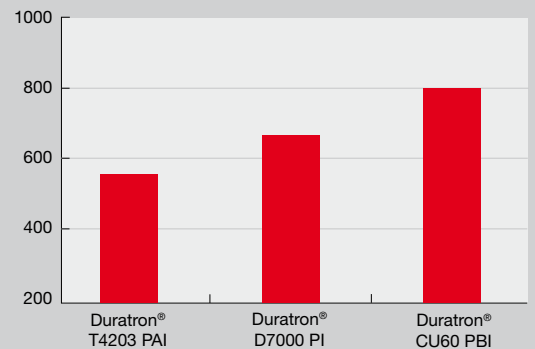

Competitive Advantage

Duratron® D7000 series machinable polyimide fits perfectly in the Mitsubishi Chemical Advanced Materials portfolio. It is an exceptional value for applications where thermal requirements exclude Duratron® PAI and do not require the extraordinary thermal resistance of Duratron® PBI. Duratron® PI is available in several grades for structural and wear applications and in the broadest range of shapes - particularly thick sheets, larger sheet geometries and heavy-wall tubes.

Duratron® PI machinable shapes are ideal starting points for designs that reduce weight, extend length of service before maintenance or replacement and reduce overall cost by increasing process uptime. Duratron® PI materials are just one of the solutions in the machinable plastics industry's broadest product line.

Key benefits

- Good performance at elevated temperature (>600°F)
- Good chemical resistance
- Easily machined from a broad range of shapes - rod, sheet, tubular forms
- High strength, tough and dimensionally stable

Common Applications

- Valve and pump seats, seals, and wear surfaces
- Structural and wear parts for semiconductor and electronics manufacturing
- Fixtures and handling parts for glass and plastics manufacturing
- Metal replacement for aerospace components - lightweight, lubrication-free

Data Sheet - Duratron® D7000 PI

	Property	Units	Test Method	Typical Average Value
Mechanical Properties	Specific Gravity @ 73°F	-	ASTM D792	1.37
	Ultimate Tensile Strength	psi	ASTM D638	17,500
	Tensile Modulus	psi	ASTM D638	540,000
	Elongation, at break	%	ASTM D638	6
	Flexural Strength	psi	ASTM D790	25,000
	Flexural Modulus of Elasticity	psi	ASTM D790	550,000
	Shear Strength	psi	ASTM D732	16,000
	Compressive Strength @ 10% Deformation	psi	ASTM D695	27,000
	Compressive Modulus	psi	ASTM D695	380,000
	Hardness, Rockwell	-	ASTM D785	R128
	Hardness, Durometer, Shore "D" Scale	-	ASTM D256	90
	Notched Izod Impact (1/8")	ft. lb./in. of notch	QTM 55007	1.0
	Coefficient of Friction - Dynamic (unlub.)	-	QTM 55007	0.29
	Limiting PV with 4:1 safety factor applied	ft. lbs./in.2 -min.	QTM 55007	15,000
	Wear Factor x 10-10, at 50 psi x 100 fpm	in ³ -min./ft. lbs. hr	QTM 55010	150
Thermal Properties	Coefficient of Liner Thermal Expansion (-40°F to 300°F)	in./in./°F	ASTM E831	2.25 x 10 ⁻⁵
	Deflection Temperature @ 264 psi	°F	ASTM D648	670
	Tg-Glass Transition (amorphous)	°F	ASTM D3418	690
	Melting Point (crystalline) peak	°F	ASTM D3418	N/A
	Continuous Use Temperature (1)	°F	-	500
	Thermal Conductivity	BTU in./(hr. ft.2 °F)	ASTM E1530	1.50
Electrical Properties	Dielectric Strength	Volts/mil	ASTM D149	395
	Surface Resistivity	ohms/square	EOS/ESD S11.11	>1013
	Dielectric Constant, 106 Hz	-	ASTM D150	3.2
	Dissipation Factor, 106 Hz	-	ASTM D150	0.005
	Flammability @ 3.1mm (1/8 in.) ⁽²⁾	-	UL94	V-0
Other	Water Absorption	% by wt.	ASTM D570 ⁽²⁾	0.7
	Water Absorption at Saturation	% by wt.	ASTM D570 ⁽²⁾	3.8

(1) Data represents estimated maximum long-term service temperature based on practical field experience.

(2) Specimens: 1/8" thick x 2" diameter or square.

(3) Estimated rating based on available data. The UL-94 Test is a laboratory test and does not relate to actual fire hazard.

Mitsubishi Chemical Advanced Materials

Europe

Mitsubishi Chemical Advanced
Materials Europe NV
Galgenveldstraat 12
8700 Tielt, Belgium
T +32[0] 51 42 35 11
F +32[0] 51 42 33 10
contact@mcam.com

North America

Mitsubishi Chemical Advanced
Materials Inc.
2120 Fairmont Avenue
PO Box 14235 - Reading, PA 19612-4235
T 800 366 0300 | +1 610 320 6600
F 800 366 0301 | +1 610 320 6638
contact@mcam.com

Asia-Pacific

Mitsubishi Chemical Advanced
Materials Asia Pacific Ltd.
Unit 7B, 35/F, Cable TV Tower,
9 Hoi Shing Road, Tsuen Wan, Hong Kong
T +852 2470 26 83
F +852 2478 99 66
contact@mcam.com

All statements, technical information and recommendations contained in this publication are presented in good faith and are, as a rule, based upon tests and such tests are believed to be reliable and practical field experience. The reader, however, is cautioned that Mitsubishi Chemical Advanced Materials does not guarantee the accuracy or completeness of this information and it is the customer's responsibility to determine the suitability of the products of Mitsubishi Chemical Advanced Materials in any given application.

Duratron® is a registered trademark of the Mitsubishi Chemical Advanced Materials group of companies.

Follow us



@MCAMconnect

